


«TRITUBO AEREO» 3 microduct 12/10

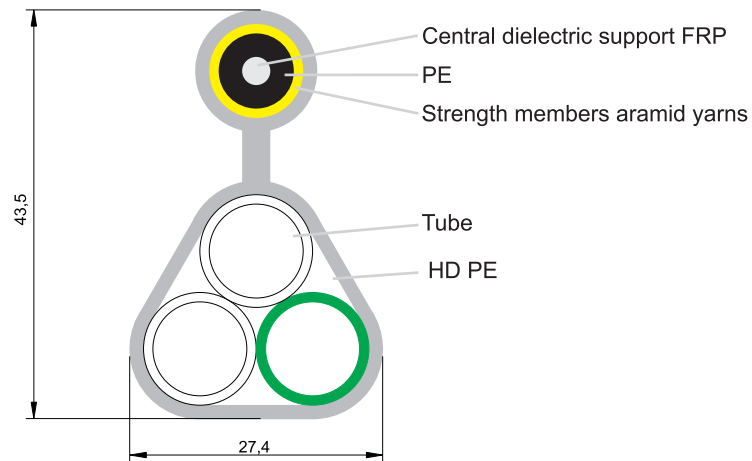

GENERAL CHARACTERISTICS

	VALUE	
Microduct in the cable	N°	3
Nominal Microduct diameter	mm	12/10
Nominal outer sheath thickness	mm	1,5
Nominal weight	kg/km	340


MICRODUCT COLOUR

	COLOUR
PILOT	Green
OTHERS	White

CABLE PERFORMANCES

TEST	NORMS of REFERENCE	NOMINAL VALUE	
Minimum bending radius	IEC 60794-1-2 - E11	≤ 40 x outer diameter	
Tensile test	IEC 60794-1-2 - E1	Max. installation tension	5000 N
Impact test	IEC 60794-1-2 - E4	Energy: 15 J N° impact: 3	Max. att. increase <0,05 dB (reversible)
Temperature cycling	IEC 60794-1-2- F1	transport&storage	-40°C / +70°C
		installation	-20°C / +50°C
Water penetration	IEC 60794-1-2- F5	3 m cable; 1 m water column x 24 h	no leakage





«EXAMPLES of MICRODUCT»

