


Fristam FPM / FSM

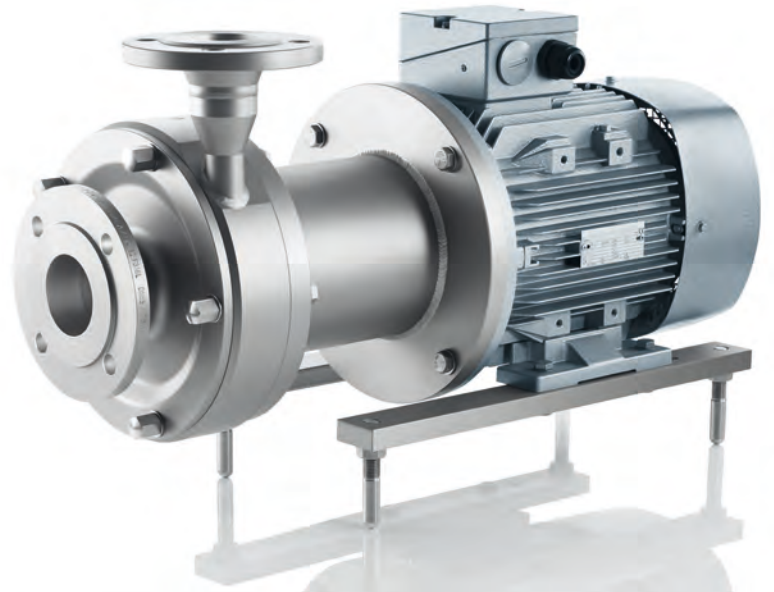

Fristam
PUMPS

Centrifugal pump / shear pump FPM / FSM


Specifically suited for transferring toxic, dangerous or water-hazardous goods. These magnetically coupled pumps are designed for applications with special safety requirements. The open impeller is connected to the driving unit via a magnetic coupling that is contact-free. The product space is hermetically sealed from the environment by a separating can.

SPECIFICATIONS*

Design

Solid stainless steel structure in monobloc design with an open impeller connected to the drive unit via a magnetic coupling.

Construction

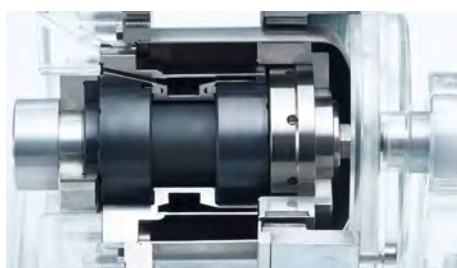

The pump power is transmitted from the drive shaft contact-free via the magnetic coupling. This ensures that the pump speed always corresponds to the drive speed. Thanks to the special bearings of the magnetic coupling's internal rotor, only the drive speed is transmitted to the drive shaft, avoiding any undesirable forces.

The Fristam FSM is available as a shear pump featuring a combination of rotor and stator that produces homogenised multi-phase products of supreme quality.

Material

Stainless steel 1.4404 (316L), alternative materials upon request

Separating can

Hastelloy (standard), PEEK or ceramics (upon request)

Sealing

Magnetic coupling as hermetic sealing – no mechanical seal

Mounting

To suit requirements

Max. temperature

350°C



BENEFITS AT A GLANCE

- No mechanical seal
- Hermetic sealing between product and atmosphere
- For transferring toxic, dangerous and water-hazardous goods
- Smooth transfer of liquids with solids content of up to 5 wt%

* Please note that the technical information provided above is subject to further development of the product range.

Fristam Pumpen KG (GmbH & Co.)
Postfach 80 08 80
21008 Hamburg, Germany

Tel. +49 (0)40 725 560
Fax +49 (0)40 7255 6166
Email info@fristam.de

For international contact
information, please
visit www.fristam.de.

Fristam
PUMPS

Centrifugal pump / shear pump FPM / FSM


Specifically suited for transferring toxic, dangerous or water-hazardous goods. These magnetically coupled pumps are designed for applications with special safety requirements. The open impeller is connected to the driving unit via a magnetic coupling that is contact-free. The product space is hermetically sealed from the environment by a separating can.

SPECIFICATIONS*

Design

Solid stainless steel structure in monobloc design with an open impeller connected to the drive unit via a magnetic coupling.

Construction

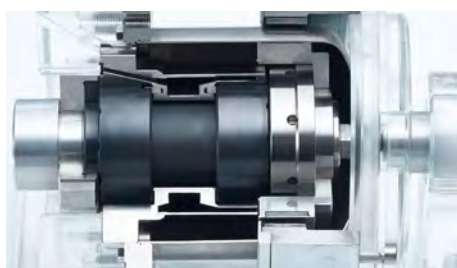

The pump power is transmitted from the drive shaft contact-free via the magnetic coupling. This ensures that the pump speed always corresponds to the drive speed. Thanks to the special bearings of the magnetic coupling's internal rotor, only the drive speed is transmitted to the drive shaft, avoiding any undesirable forces.

The Fristam FSM is available as a shear pump featuring a combination of rotor and stator that produces homogenised multi-phase products of supreme quality.

Material

Stainless steel 1.4404 (316L), alternative materials upon request

Separating can

Hastelloy (standard), PEEK or ceramics (upon request)

Sealing

Magnetic coupling as hermetic sealing – no mechanical seal

Mounting

To suit requirements

Max. temperature

350°C



BENEFITS AT A GLANCE

- No mechanical seal
- Hermetic sealing between product and atmosphere
- For transferring toxic, dangerous and water-hazardous goods
- Smooth transfer of liquids with solids content of up to 5 wt%

* Please note that the technical information provided above is subject to further development of the product range.

Fristam Pumps UK Limited Partnership
Unit 11 APEX Business Park
Diplocks Way, Hailsham
East Sussex BN27 3JU
United Kingdom

Tel +44 (0)1323 849 849
Fax +44 (0)1323 849 438
E-Mail sales@fristam.co.uk

For international contact
information, please
visit www.fristam.de.

Fristam
PUMPS